

fully non-corrosive
heat exchangers

MAX ELTE s.r.o.


Company seat, sale a service:

ELTE s.r.o., Velká hradební 37, Ústí nad Labem 400 01
Phone: +420 475 210 099; Facsimile: +420 475 211 066
E-mail: elte@elte-ustinl.cz

Buštěhrad – Manufacturing Centre:

ELTE s.r.o., Kladenská 550, Buštěhrad 273 43
Phone/Facsimile: +420 312 250 233; +420 312 250 724
E-mail: vyroba@elte-ustinl.cz

<http://www.elte-ustinl.cz>

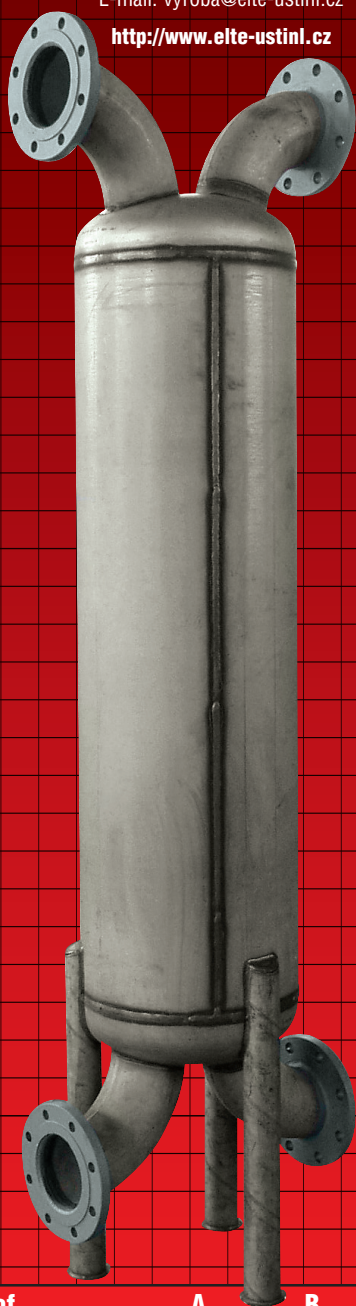


Construction parameters

on primary and secondary side

	I.	II.	III.
Max. temperature:	250 °C	165 °C	180 °C
Max. overpressure:	1,6 MPa	2,5 MPa	2,5 MPa
(max. overpressure in pipes and shell)			
Material:	WNr. 1.4541, AISI 321 (ČSN 17 248.4)		

Suit for power facilities, food processing,
pharmaceutical and textile industry.

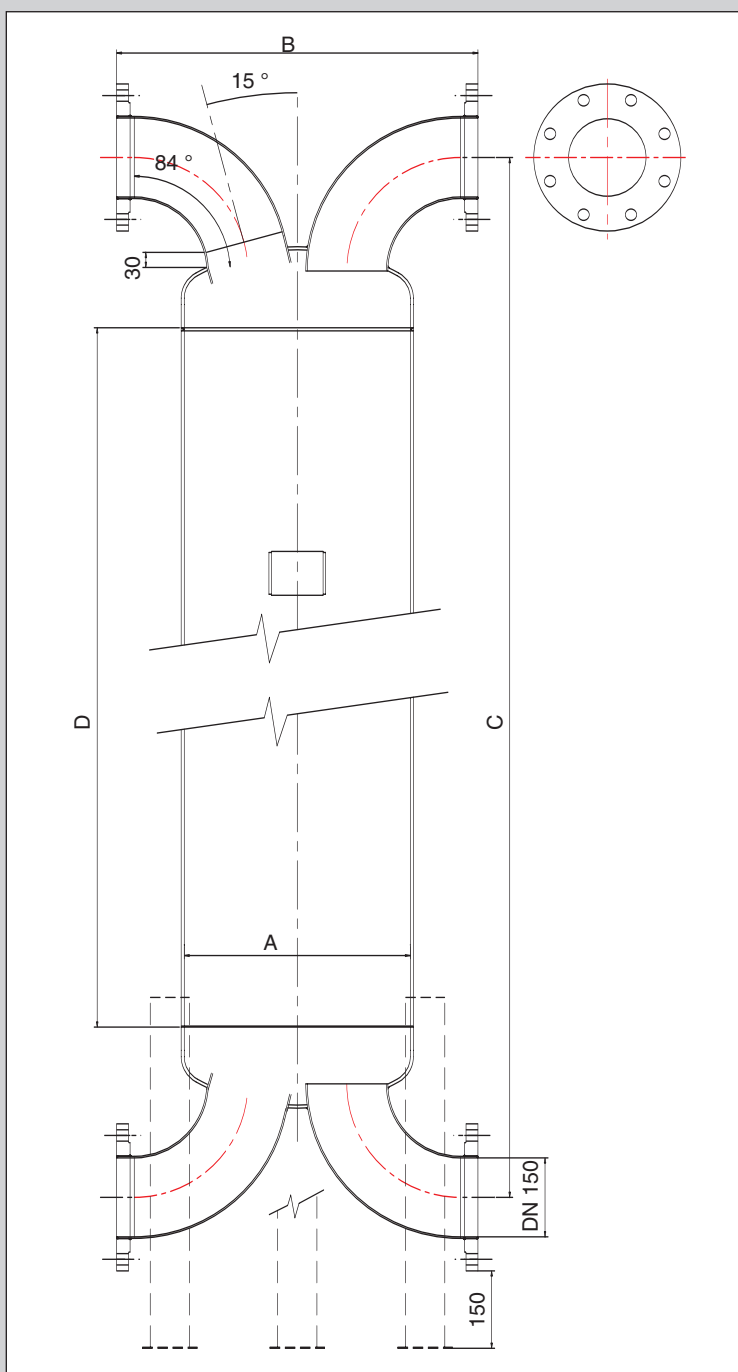

Typ of heat exchanger	A	B	C	D	DN	PN	No. of tubes	Heating surface	Weight at PN 16
	mm	mm	mm	mm	mm	MPa	ks	m ²	kg
MAX 17.4-40-10	450	700	2160	1500	150	4,0/1,6	211	40	350,0
MAX 18.4-57-8	500	700	2000	1478	150	4,0/1,6	402	57	488,5